



gEEk[®] spEEk

Twinax Basics | Presenter: John Abbott


Introduction

- What is twinaxial Cable?
- Twinax Signal Integrity Advantages
- Twinax Signal Integrity Challenges
- Twinax Constructions and their Impact on SI



What is Twinaxial Cable?


- Architecturally, twinaxial cable is similar to coaxial cable as both have inner and outer conductors and a dielectric.
- Twinax has a second conductor as it is primarily used for differential signaling.

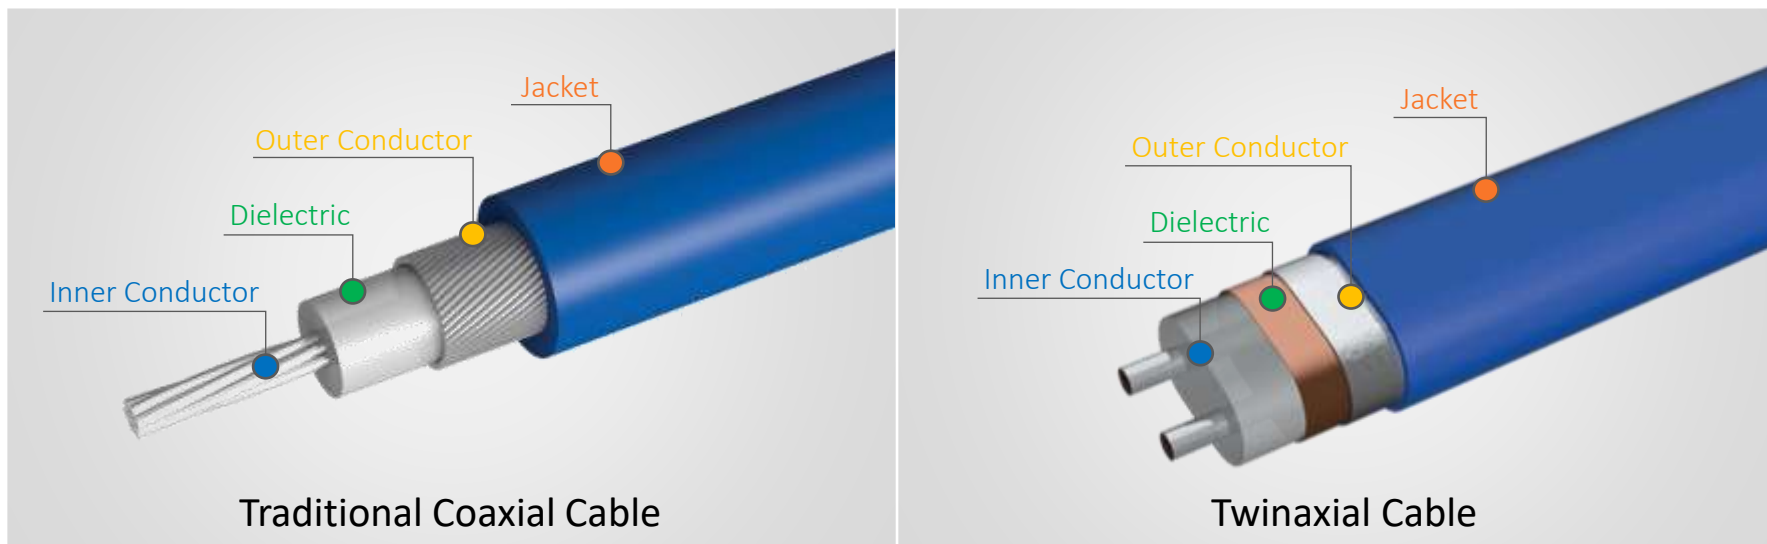

Signal Integrity Advantages: Loss

- Twinax has a distinct loss advantage over a PCB trace. Why is twinax so much better?

MORE COPPER

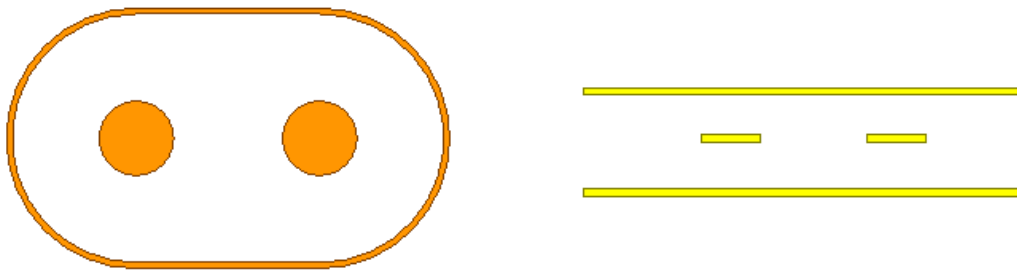


Dimensional difference between 34 AWG twinax and 0.50 oz PCB trace

LOWER LOSS DIELECTRIC




FEP has an order of magnitude less loss than the best PCB material

BETTER THERMAL PERFORMANCE

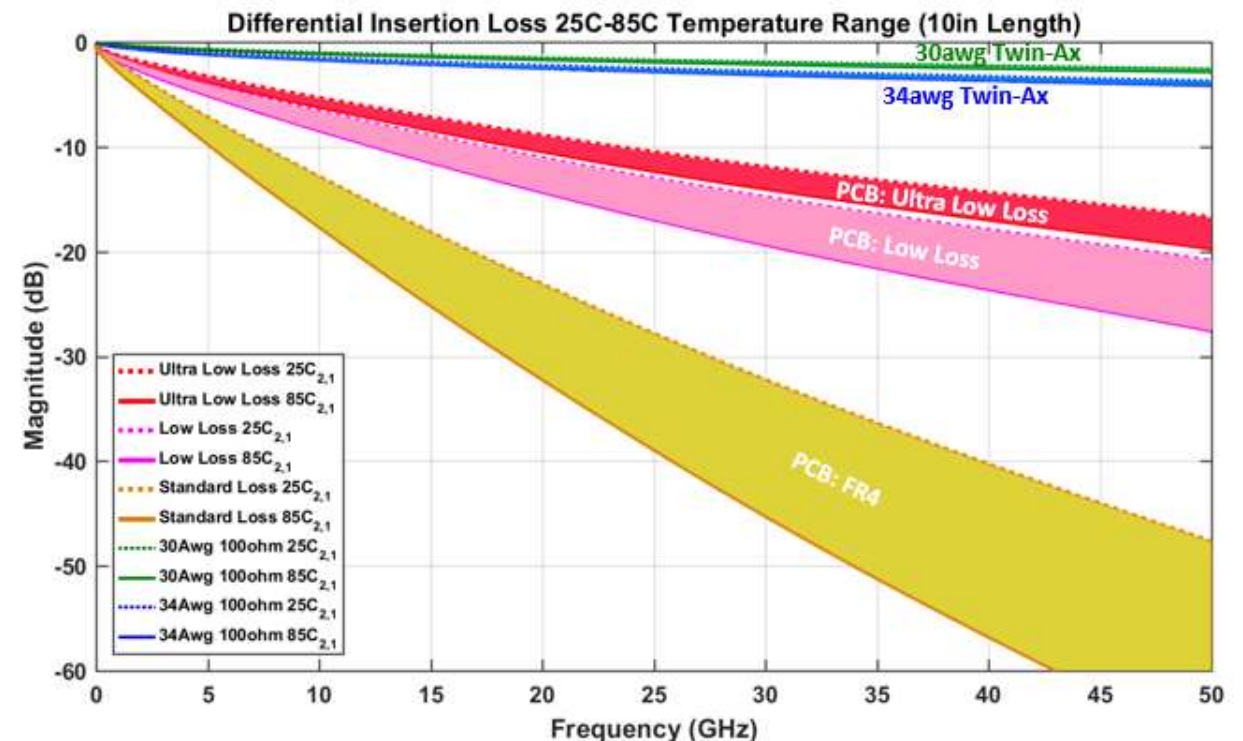


SI Advantages: Miscellaneous

MINIMAL CROSSTALK

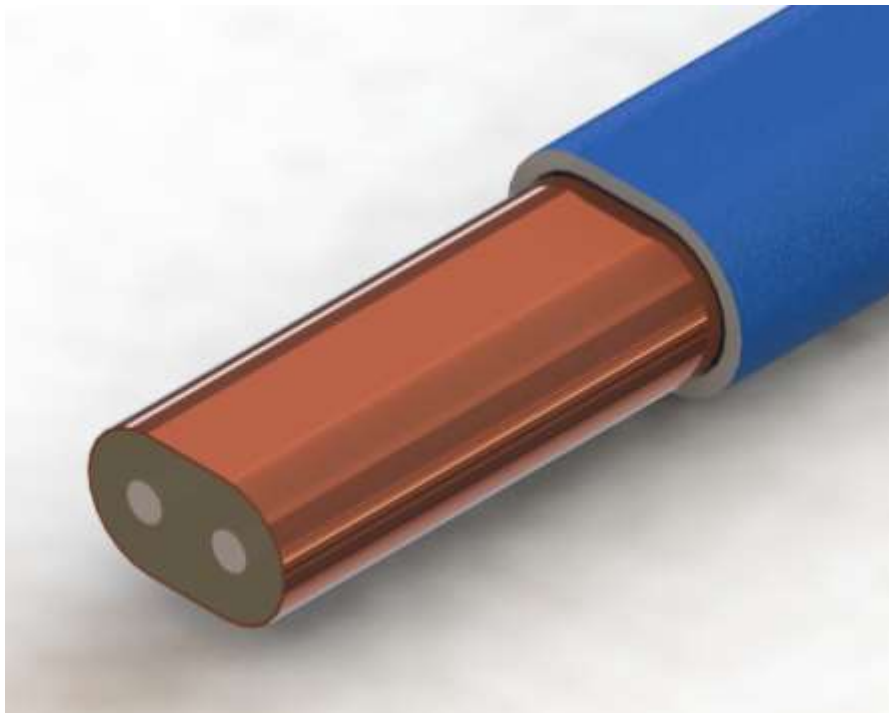

Some twinax cables are completely wrapped with a solid outer conductor


FASTER PROPAGATION VELOCITY

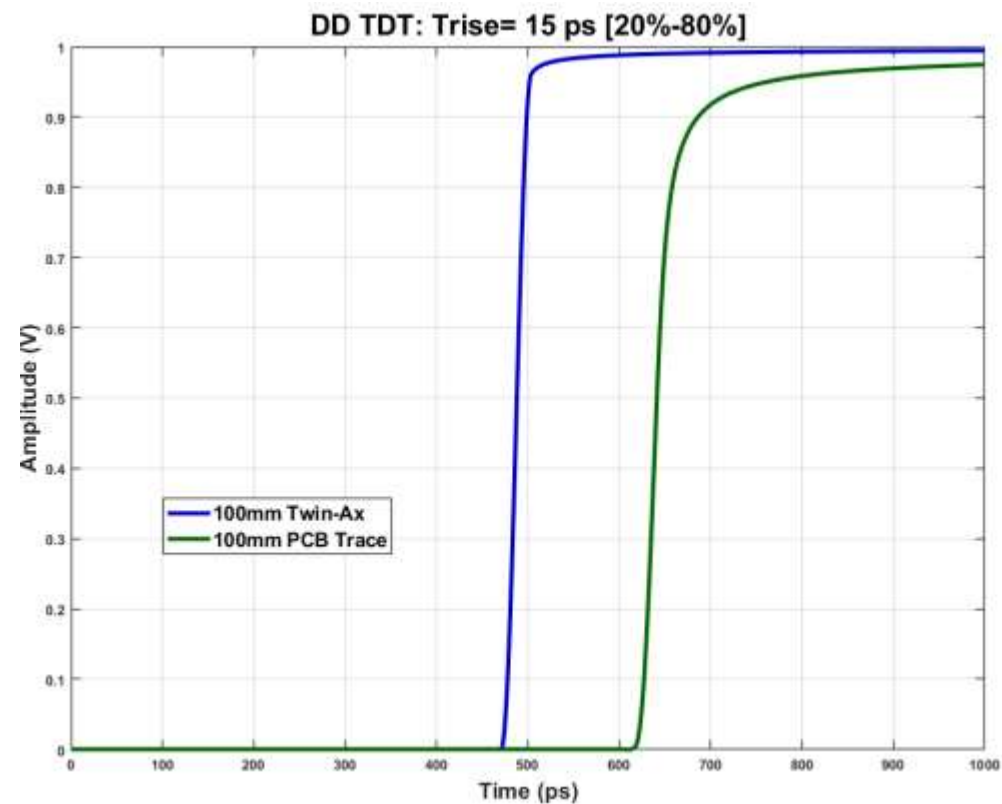

Twinax cable can have a 20%-40% faster propagation velocity than PCB trace


SI Challenges

INTRA-PAIR SKEW

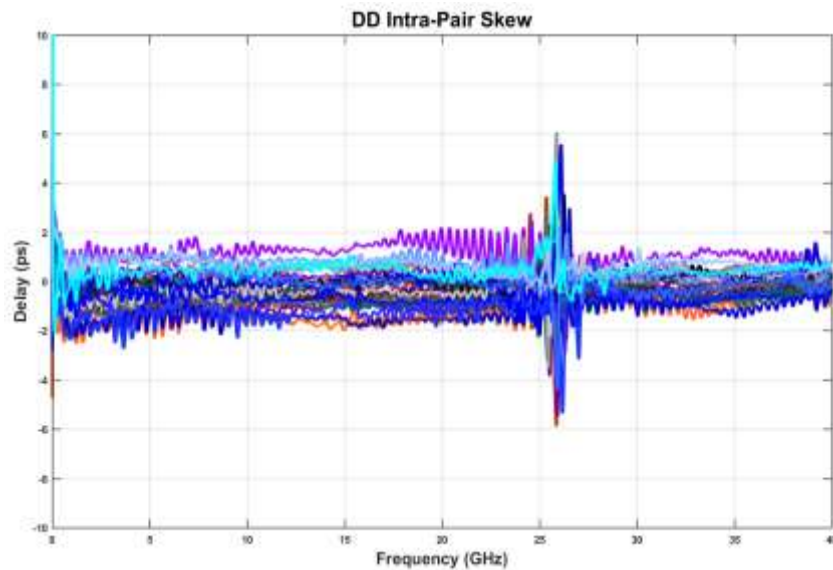


Depending on the architecture, skew with a differential pair can be challenging

TRANSITIONING TO/FROM PCB

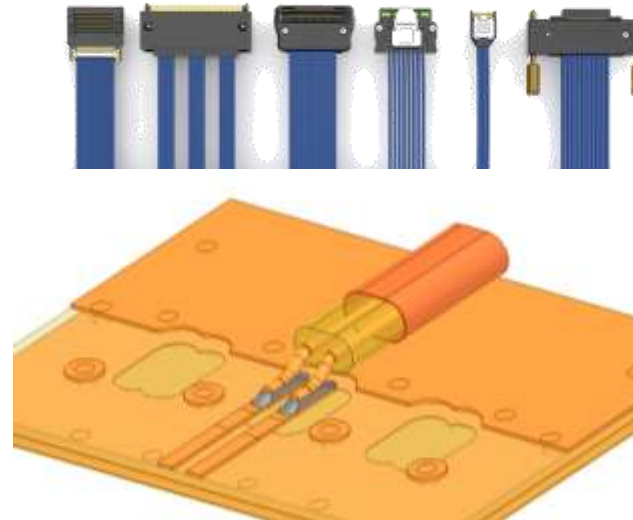

Getting signals from silicon into twinax is not easy, and there is always an SI penalty


HIGH FREQUENCY SINGLE-ENDED SIGNALING

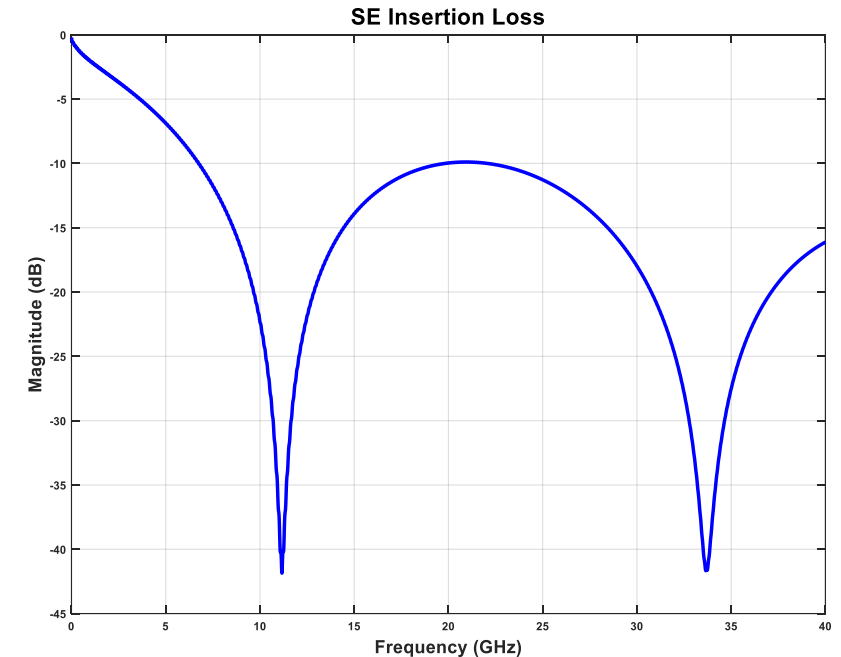

In addition to obvious crosstalk issues, the presence of even a small amount of air causes enough mode conversion to limit how fast a single-ended signal can travel in twinax

Twinax Construction: Drain Wires

SINGLE-DRAIN (CENTER)

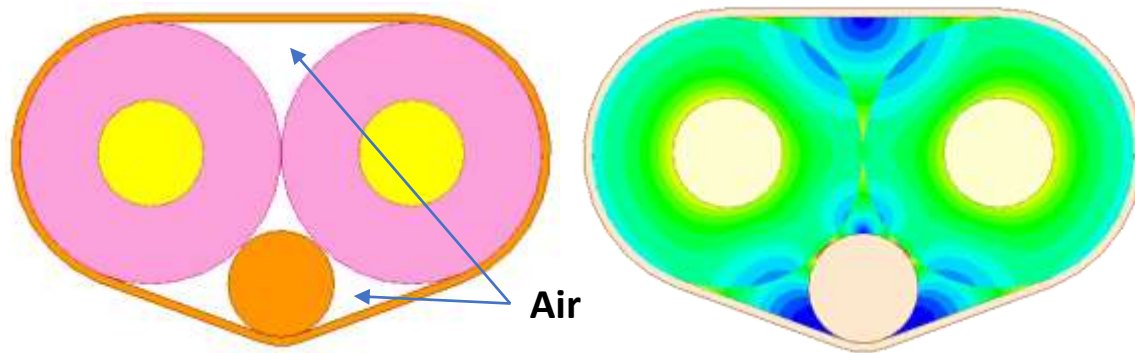


Pros:

Easy to solder/weld to terminating interconnect.
Easy to manufacture.

Cons:

Trapped air can cause large insertion loss “suck-out”.
High intra-pair skew.
Larger bend radius.

DRAIN-LESS

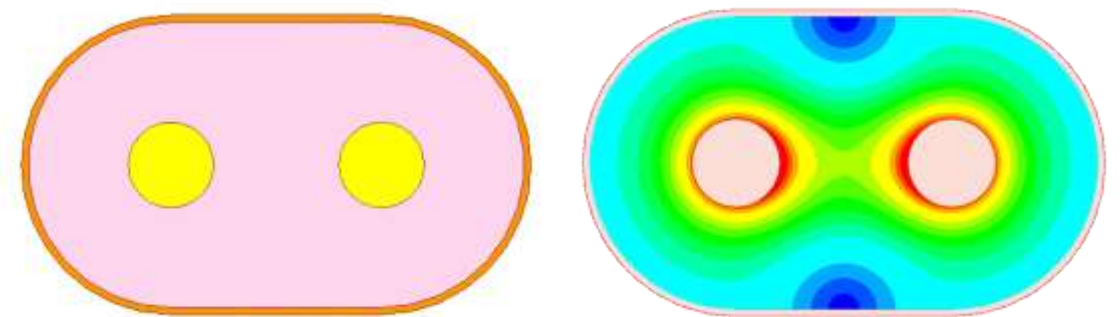

Pros:

Less air, more homogenous environment. (Low skew)
Tighter bend radius.

Cons:


Difficult to solder shield to terminating interconnect.

Twinax Construction: Extrusion Types



Cable Extruder


SINGLE EXTRUSION (X2)

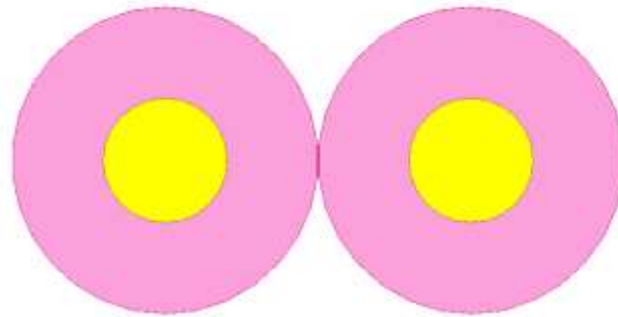

Pros:
Easy to manufacture,
particularly at smaller AWG

Cons:
Higher skew.
Insertion loss "suck-out"

CO-EXTRUSION

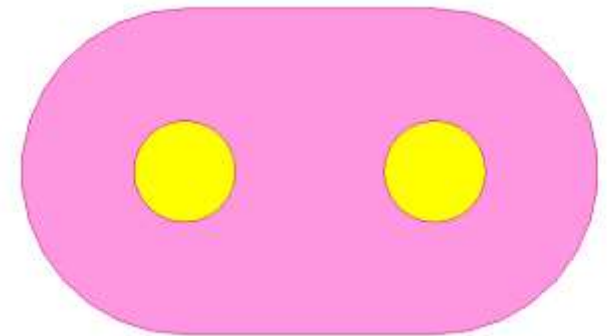


Pros:
Best skew performance

Cons:
Difficult to manufacture

Twinax Construction: Cu vs Al Wrap

Cu shield is 10x
in thickness of
Aluminized
Mylar

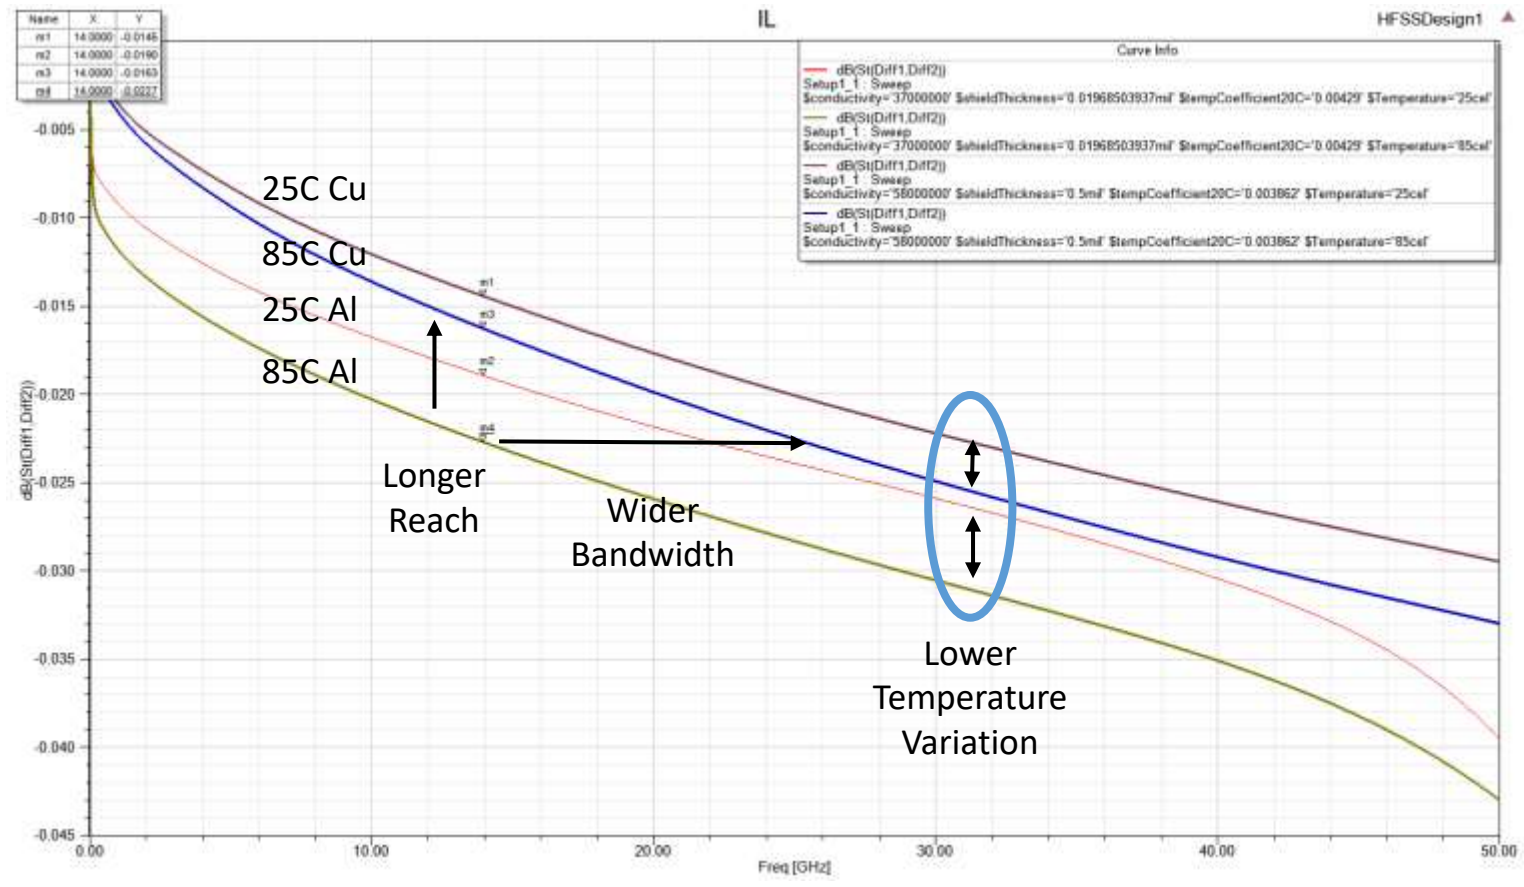


Twinax Construction

LONGITUDINAL WRAP



- Difficult to wrap reliably
- Overlap seam is in a static location, more likely to cause skew
- Less flexible

HELICAL WRAP

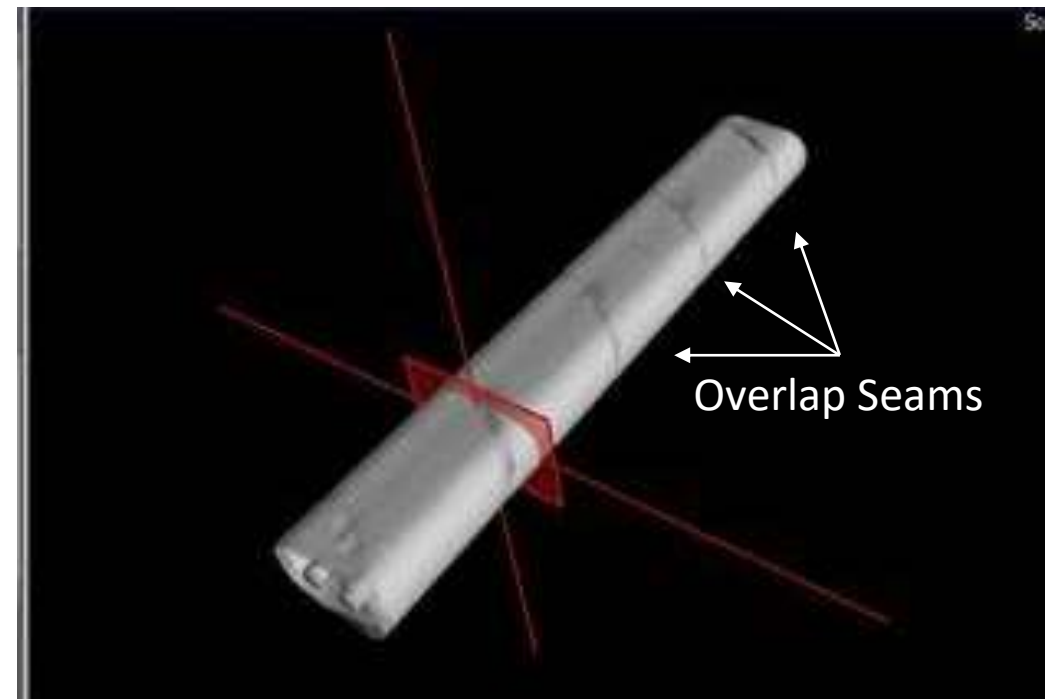

- Overlap seam creates a spiral air channel that self corrects, lowering skew
- A repetitive discontinuity does occur and can cause sharp narrow band resonance but can be controlled and placed out of band



For information about Samtec's gEEk[®] spEEk presentations,
contact: gEEkspEEk@samtec.com

For Signal Integrity questions, contact: SIG@samtec.com